



# **DGL8500C/FTA**

**8 x DVB-S/S2/T/T2/C > 4 x DVB-T/C + IP**

## **Operation Manual**



# **1. IMPORTANT SAFETY PRECAUTIONS INFORMATION**

## **READ THE FOLLOWING WARNINGS BEFORE YOU USE YOUR DEVICE**

### **WARNING**

**The following safety precautions must be observed to prevent fire or electric shock hazard. Safety precautions include but are not restricted to the following:**

#### **Power supply / Mains cord**

- Operate the unit only within the voltage range defined as appropriate by the manufacturer.
- Occasionally check the power connector and remove dirt or dust that may have accumulated.
- Use only the mains cord that comes with your unit.
- Do not operate the unit or plug in the mains cord if it is broken, split, or damaged in any way.
- Do not place the mains cord next to heating devices. Do not pull it, place heavy objects on it or damage it in any way. Keep it out of reach of children.
- Ensure that the device is plugged in a properly grounded socket. Insufficient grounding may cause electrocution.
- Always carefully disconnect all plugs by pulling on the plug and not on the cord. Make sure the unit's power switch is turned off before removing the cord from an outlet.
- Disconnect the mains cord when the unit is not in use for long periods of time or during storms.
- Do not connect the unit to a multiple-outlet to avoid plug overheating.

#### **Disassembling**

- This unit contains parts that cannot be repaired by the user. Do not disassemble or try to repair it as this will void all warranties. Please contact the manufacturer if you experience any problems with your unit.

#### **Water/humidity**

- Do not keep the unit in a humid place or near water.
- Do not plug/unplug the unit with wet hands.

#### **Fire**

- Never place a candle or another source of fire on the unit as it may fall and start a fire.
- If the mains cord or the power connector is damaged or destroyed, or if there is a sudden loss of picture during operation, or if you notice a strange smell or there is smoke, immediately switch the unit off, disconnect the mains cord and contact the manufacturer's technical support department.

**Installation / Storage**

- This unit contains high precision pieces of electronics. To ensure optimal performance and avoid damage, do not store it in any location where it may collect dirt, dust, lint, etc. Do not expose it to extreme heat or cold (e.g. in direct sunlight, near a heater or in the car during the day). Place the unit in a secure place to avoid falls.
- Before moving the unit, always unplug all cords first.
- When installing the unit, make sure that an outlet is within easy reach. In case of malfunction, switch the unit off and unplug the power cord. When the unit is not in use for a long period of time, make sure that the mains cord is disconnected.

**Connectivity**

- Before connecting the unit to other electronic devices, always switch off and unplug all devices.

**Maintenance**

- Do not spill liquids on the unit. Do not use any diluents or volatile liquid to clean the unit. Instead, use a soft slightly damp cloth and allow the unit to dry completely before using again.

**Handling**

- Do not poke your finger into the openings on your unit.
- Never put paper, metal parts or other objects into the openings of your unit. If you suspect that there are foreign parts in your unit, switch it off and unplug the mains cord. Contact the manufacturer's technical support department.
- Do not step on or place heavy objects on top of the unit. To avoid hardware damage, handle all buttons, connectors and switches gently.

## 2. INTRO

Congratulations on purchasing the DGL8500C/FTA. You now own a high quality, professional DTV headend. To get the most out of your purchase, please take the time to carefully read through this manual.

## 3. INSTRUCTIONS

### 3.1 - DESCRIPTION

The DGL8500C/FTA is a very powerful, all-in-one device, able to receive up to 8 independent satellite (DVB-S/S2), terrestrial (DVB-T/T2) or cable (DVB-C) signals and convert them in 4 x DVB-T/C RF output channels while making Gbit IP streaming **simultaneously**. It supports “pool” technology, meaning that the user is able to select any program from any of the 8 inputs and assign it to any of the 4 RF + IP outputs providing great flexibility.

The embedded web server of the DGL8500C/FTA provides a very friendly user interface as well as the ability of remote or local control of the device via Ethernet.

Its small size and its powerful features renders the DGL8500C/FTA the ideal solution in cases we want to distribute FTA (Free-To-Air) TV programs coming from satellite (DVB-S/S2), terrestrial (DVB-T/T2) or cable (DVB-C) sources to a CATV installation using the DVB-T/C and IP technology.

### 3.2 - FEATURES

- 8 x independent multi-standard inputs DVB-S/S2/T/T2/C
- 4 x RF output DVB-T/C (software selectable)
- Gbit IP streaming (up to 64 x SPTS / 4 x MPTS)
- “Pool” technology
- MER value > 40dB
- Very clean RF spectrum
- PCR re-stamping
- Very friendly user interface
- Wall or rack mountable
- Compact size
- 5 year warranty

#### 3.2.1 - Auto-reset functions and watchdog

During the normal operation of the DGL8500C/FTA, the main CPU monitors all the internal parts in order to ensure that the device works normally. In case of an internal error or module failure, the DGL8500C/FTA immediately initiates the recovery procedure by resetting the appropriate module or the device. Finally, watchdog timers ensure that the device will be reset in case of CPU failure.

#### 3.2.2 - “Pool” technology

The DGL8500C/FTA supports “pool” technology, meaning that the user is able to select any TV or Radio program from any input and assign it to any of the 4 outputs providing great flexibility.

### 3.2.3 - DVB-T or DVB-C compliant

The user is able to software select the modulation standard, between DVB-T and DVB-C, of the DGL8500C/FTA without the need of any firmware upgrade.

### 3.2.4 - IP streaming


The DGL8500C/FTA is able to make IP streaming simultaneously with the RF modulation up to 64 SPTS programs or 4 MPTS using UDP or RTP protocol, multicast or unicast.

The max. output bitrate can be up to 480 Mbps in “IP only” mode.


### 3.2.5 - Smart cooling

The DGL8500C/FTA uses “Smart Cooling” technology in which the fan increases/decreases its speed according to temperature variation. In case the temperature is lower than 25°C the fan stops working to expand its lifetime. In case of fan failure or over temperature (>65°C) the device stops working to protect itself.

## 3.3 - BLOCK DIAGRAM

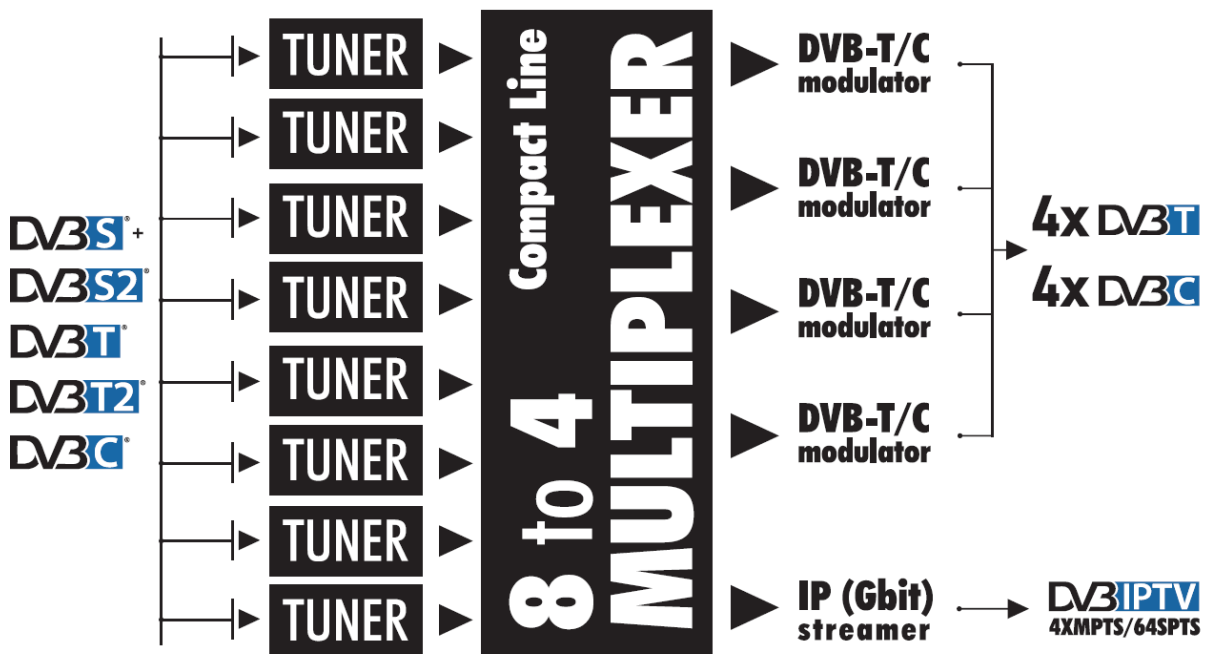


### 3.4 - FRONT PANEL

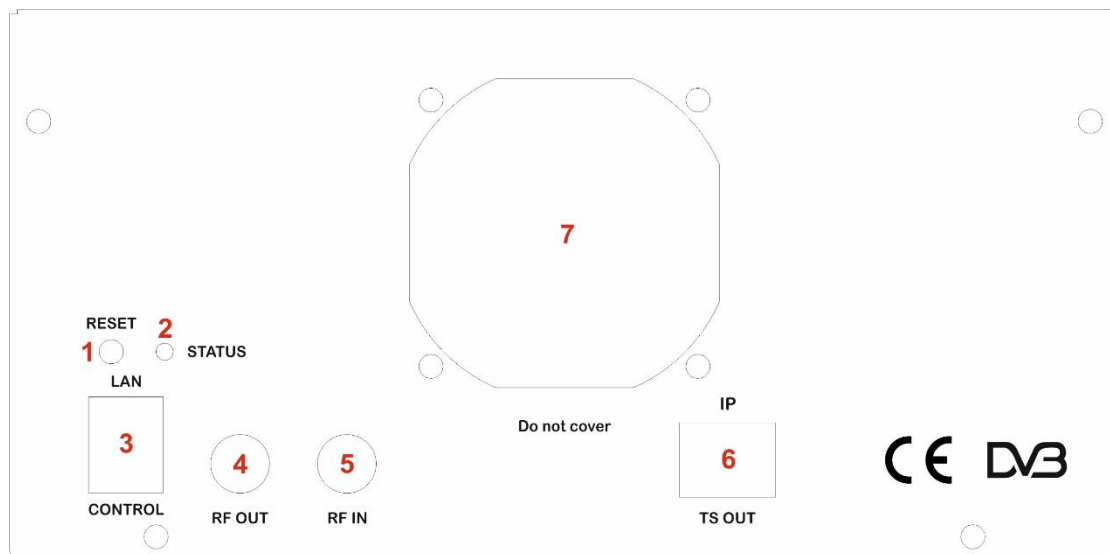

1. Reset button
2. Status LED
3. IP LAN control
4. RF output
5. RF input
6. IP streaming output
7. Fan cooler

### 3.5 - BACK PANEL

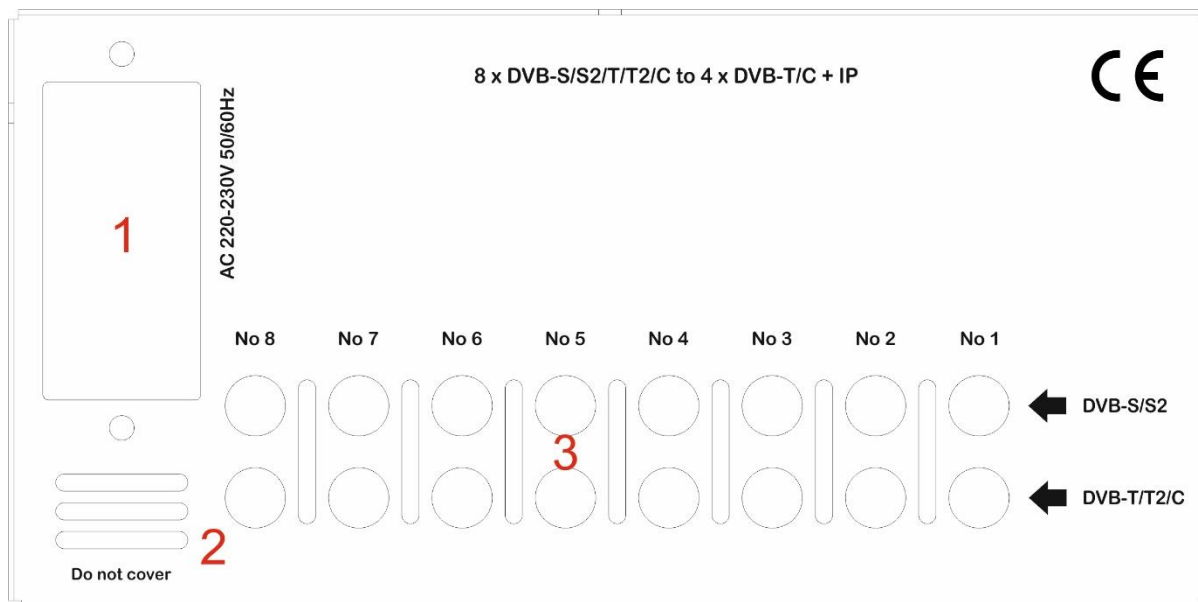

1. Power input
2. DVB-S/S2/T/T2/C inputs
3. Air ways

## 4. INSTALLATION

### 4.1 - General

The DGL8500C/FTA has a very friendly interface for programming and monitoring purposes. The user is able to gain access to the embedded webserver, by opening an Internet browser (e.g. Internet Explorer, Firefox or Chrome) and type the following static IP: **192.168.1.200**.

The default username and password are the following:

Username: admin  
Password: 12345

### 4.2 - Embedded Webserver

#### Status

##### 4.2.1 - “General” page

Every time that the user is connected to the device, the “General” page (Figure No 1) is loaded providing a current general status information of the device.

Status

General

Program list

Block diagram

Setup

Input

Program selection

Output

> RF output

> IP streaming

> TS settings

> NIT

System

LAN

Administration

System restart

Factory defaults

Import / Export config.

Firmware update

Info

Status

Inputs	Status	Mode	TS status	Frequency (MHz)	Bandwidth	Symbol rate (ksps)	Band	Polarity	Constellation	DiSEqC
Input 1	Unlocked	DVB-S/S2	●	12432 / 1832		22000	High	H		PortA
Input 2	Locked	DVB-S/S2	●	12344 / 1744		22000	High	H		PortA
Input 3	Locked	DVB-S/S2	●	12462 / 1862		22000	High	H		PortA
Input 4	Locked	DVB-S/S2	●	12491 / 1891		22000	High	H		PortA
Input 5	Locked	DVB-C	●	482	8 MHz	6900			256-QAM	
Input 6	Locked	DVB-T/T2	●	474	8 MHz					
Input 7	Disabled									
Input 8	Disabled									

Outputs	Status	Frequency (MHz)	Constellation	Code rate	Guard interval	Channel bandwidth	Modulation	
Output 1	Running	474.00	64-QAM	7/8	1/32	8 MHz	8K	
Output 2	Running	482.00	64-QAM	7/8	1/32	8 MHz	8K	
Output 3	Running	490.00	64-QAM	7/8	1/32	8 MHz	8K	
Output 4	Running	498.00	64-QAM	7/8	1/32	8 MHz	8K	

System

Status

Multiplexer	OK
IP streamer	OK
Modulator mode	DVB-T
CPU temperature	41.5 °C
Cooling	Fan OK
Status code 1	00 00 00 00
Status code 2	00 00 00 00

Figure No 1

#### Status - Inputs 1...8

In these fields, the user is able to see the status of each tuner e.g. If it is locked / unlocked or disabled, the working mode eg. DVB-S/S2, DVB-T/T2 or DVB-C etc...

## Outputs – Modulator 1...4

In these fields, the user is able to see the status of all the RF outputs of the device such as modulator's state, RF output frequencies and modulation settings.

## System

This section provides general information of the device, like internal status of all device's modules, CPU temperature and fan state as well as error codes for troubleshooting purposes.

### 4.2.2 - "Program list" page

In "Program list" page (Figure No 2) the DGL8500C/FTA provides information of all programs that are currently being distributed via its four RF and IP outputs.

Program title	Service ID	LCN	From input	IP out
BR Nord HD	10326	0	1	
arte HD	10302	0	2	✓

Program title	Service ID	LCN	From input	IP out
TVOJ	5601	0	3	
SARAFAN_RUS	5602	0	3	

Program title	Service ID	LCN	From input	IP out
Einsfestival HD	10376	0	5	✓

Program title	Service ID	LCN	From input	IP out
Volksmusik	13222	0	6	✓
Bibel TV HD	13224	0	6	✓


To export all program lists to Microsoft Excel (.xlsx) file click on the icon 

Figure No 2

A small ✓ appears under the IP column indicating that the current program is being distributed via IP too, along with the RF output.

By pressing the Excel icon at the bottom of the page, a report is generated in an Excel format document (.xlsx).

### 4.2.3 - "Block diagram" page

The "Block diagram" page (Figure No 3) provides a general view of device's internal modules and architecture.



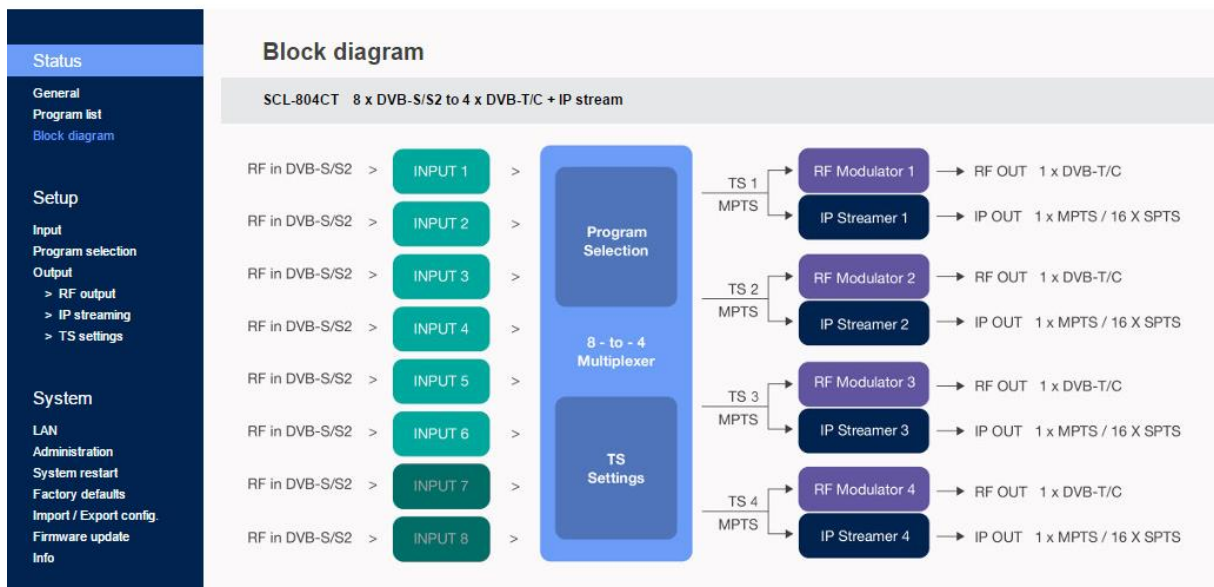


Figure No 3

All icons are clickable providing the ability to the user to go directly to the setup page of all internal modules of the device.

The grey icons mean that the current module is disabled.

## Setup

### 4.2.4 - "Input" page

In the "Input" page (Figure No 4) the user is able to select the working mode for each input.

**Input**

Input 1 Input 2 Input 3 Input 4 Input 5 Input 6 Input 7 Input 8

**Settings**

Tuner: DVB-S/S2

Frequency: ☒ SAT ☐ IF

Frequency: 12432 MHz (11700 .. 12750)

Symbol rate: 22000 kps (1000 .. 55000)

LNB voltage: Horizontal (18V)

Band: High

DiSEqC: Port A

Apply Refresh

**Status**

Tuner: Unlocked DVB-S/S2 Re-lock

Bit rate: 16590 Kbps

Signal strength: 92%

Signal quality: 42%

Figure No 4

There are eight tabs, one for each input. The user is able to select the working mode of each input as follows:

For DVB-S/S2 mode:

1. Tuner Enabled/Disabled - Enable or disable the specific tuner
2. SAT or IF frequency – Select how to insert the SAT frequency
3. Symbol rate – Insert the symbol rate
4. LNB voltage – Select the LNB voltage (13V,18V,OFF)
5. Band – Select the appropriate SAT band (works only if IF frequency is selected as input method)
6. DiSEqC – Select DiSEqC A, B, C, D

For DVB-T/T2 mode:

1. Tuner Enabled/Disabled - Enable or disable the specific tuner
2. Frequency – Insert the input frequency
3. Bandwidth – Insert the input bandwidth

For DVB-C mode:

1. Tuner Enabled/Disabled - Enable or disable the specific tuner
2. Frequency – Insert the input frequency
3. Symbol rate – Insert the symbol rate
4. Constellation – Insert constellation

Once all settings are being written for both tuners, the user must click the “Apply” button to begin the lock process.

### **Tuner status**

For each input the DGL8500C/FTA provides several information such as tuner status (Locked/Unlocked), total bitrate, signal strength and quality etc.

#### 4.2.5 - “Program Selection” page

In the “Program Selection” page (Figure No 5) the user is able to select any program from any input and assign it to any output using the “pool” technology.

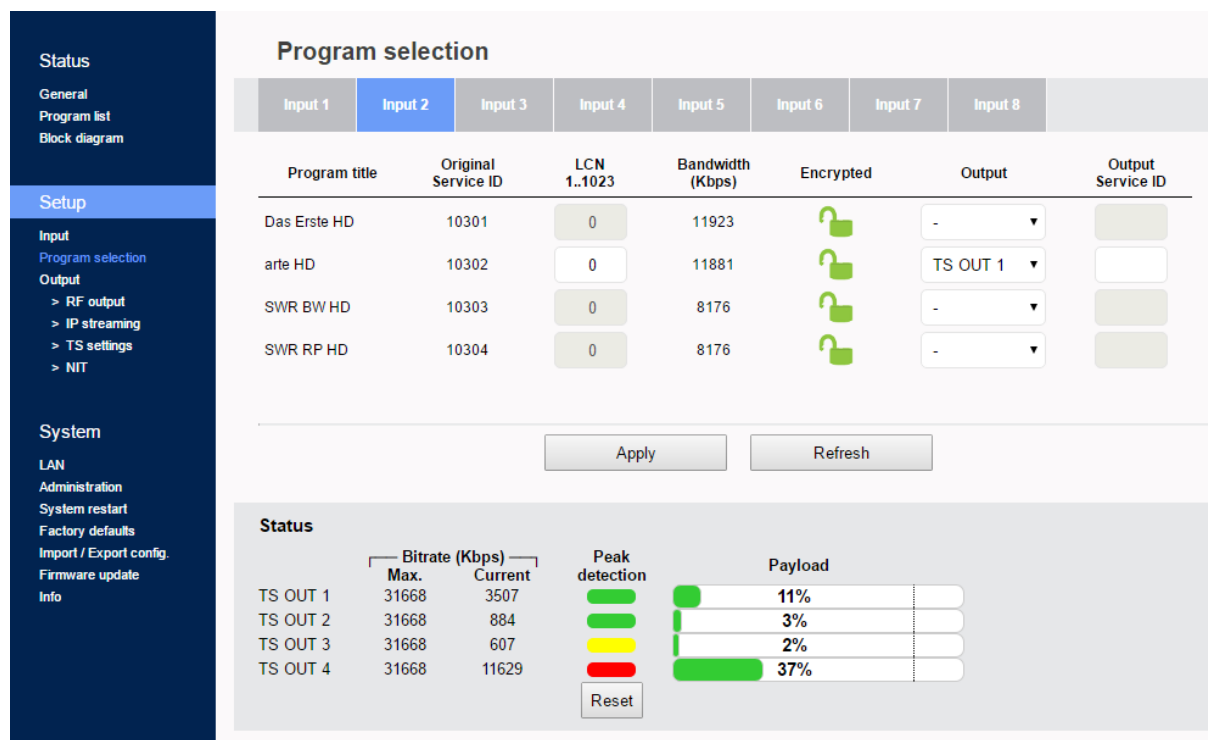


Figure No 5

There are 8 tabs, one for each input. Each tab depicts all the TV and Radio programs from the input that has being selected during the “Input page” processes.

For each program the DGL8500C/FTA provides the following information:

- Program Name – which is the name of the program
- Original Service ID – which is the original Service ID number of the program
- LCN No – which is the logic channel number of the program
- Bandwidth – which is the bitrate of the program
- Encrypted – which depicts if the program is FTA (Free-To-Air) or not
- Output Service ID – The user is able to provide custom Service ID number





Program selection							
Input 1	Input 2	Input 3	Input 4	Input 5	Input 6	Input 7	Input 8
Program title	Service ID	LCN 0..65535	Bandwidth (Kbps)	Encrypted	Output		
BR Sud HD	10325	0	6302		-		
BR Nord HD	10326	0	6302		TS OUT 1		
NDR FS NDS HD	10327	0	3364		-		
NDR FS MV HD	10328	0	3364		TS OUT 1		
					TS OUT 2		
					TS OUT 3		
					TS OUT 4		

Figure No 6

Using the Drop down menu from “Output” column (Figure No 6) the user is able to assign any program to any of the four outputs. By doing the same process for each program, from all inputs the user is able to create his own 4 custom multiplex in the output.

### Caution!

The number of programs that the DGL8500C/FTA can distribute on its output depends on the quality (SD or HD), the compression (MPEG2, H.264 etc...) and the total bitrate of each program.

For example, if we select the following DVB-T setting for the four modulators on DGL8500C/FTA outputs:

- Constellation: 64 QAM
- Guard Interval: 1/32
- Code rate: 7/8
- Bandwidth: 8 MHz

According to Appendix A we will have a total output bitrate of 31.67Mbps/ modulator. That means that we can select as many programs as the user wants but their total bitrate must not exceed the 31.67Mbps, otherwise artifacts may occur.





Status				
	Bitrate (Kbps)		Peak Detection	Payload
	Max.	Current		
TS OUT 1	31668	31318		99%
TS OUT 2	31668	29908		94%
TS OUT 3	31668	33405		105%
TS OUT 4	31668	17834		56%
Reset				

Figure No 7

The status section in (Figure No 7) provides a general idea to the user of the current payload (according to the selected programs) comparing it to the max. output payload.

It is recommended that the user must not exceed the 85% from each output, since all the bitrate are variable according to their specific content.

## Peak Detection mechanism

As shown in Figure No 7 there is a colored indicator of the peak detection mechanism, for each output transport stream. This indicates if any overflow has occurred on modulator's output bitrate with the following colors:

- Green – No overflow occurred
- Yellow – No overflow occurred but the input bitrate is close to the output bitrate
- Red – Overflow occurred. The user must decrease the input bitrate

### 4.2.6 - “RF Output” page

In the “RF Output” page (Figure No 8) the user is able to setup the RF output settings of the DGL8500C/FTA.

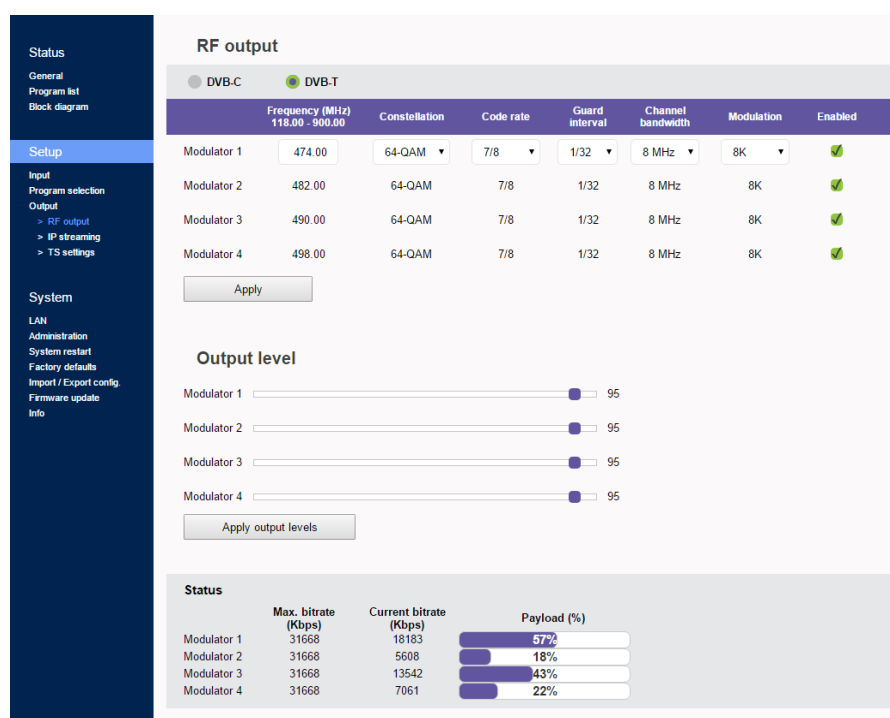


Figure No 8



With the use of the radio buttons the user is able to select the mode that the DGL8500C/FTA will operate as follows:

DVB-T: 4 x modulator working in DVB-T standard + IP streaming

DVB-C: 4 x modulator working in DVB-C standard + IP streaming

IP only: All modulators are disabled, the device does IP streaming only

For each modulator in DVB-T mode the user is able to setup the following parameters:

- Frequency – The output frequency of the first modulator\*
- Constellation – The constellation of the first modulator\*
- Code Rate – The coder rate of the first modulator\*
- Guard Interval - The guard interval of the first modulator\*
- Channel Bandwidth – The channel bandwidth of the first modulator\*
- Modulation – The modulation type of the first modulator\*
- Enable/Disable – Enable or disable the current modulator
- Output level – Adjust the output level for each modulator from 70-90dB $\mu$ V.

\* All the four outputs of the DGL8500C/FTA operate in adjacent RF output channels. This means that the user setups only the first modulator and all the other three modulators have the same settings and automatically are being programmed in adjacent channels.

E.g. If the user sets the CH21 in UHF band on modulator No1 the other three modulators will be automatically set to CH22, CH23 and CH24, respectively.

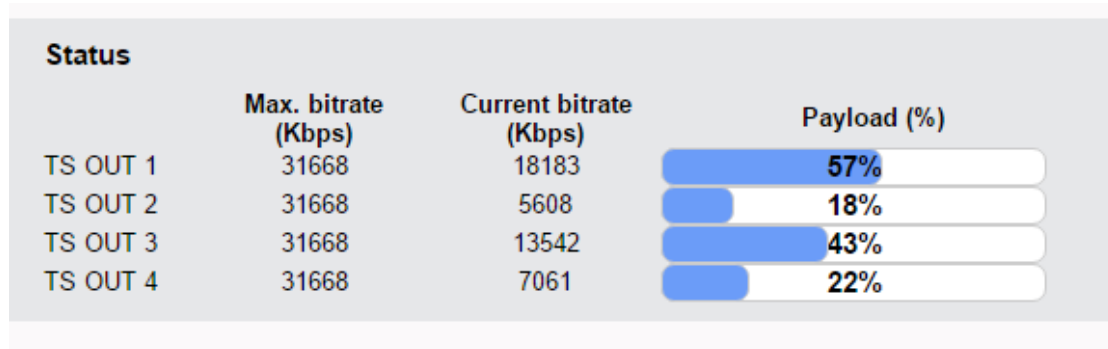


Figure No 9

#### 4.2.7 - “IP streaming” page

In “IP streaming” page the user is able to setup the IP streamer of the device.


Status	
TS1	1 SPTS out of 16
TS2	MPTS
TS3	1 SPTS out of 16
TS4	2 SPTS out of 16

Figure No 10

In Figure No 10 we have general settings of the IP streamer as follows:

- IP address: This is the IP address of the streamer for ping purposes.
- MAC address: This is the MAC address of the streamer
- IGMP: The user is able to select IGMP v2 or v3 or disable the IGMP.

The Status section provides a general view of how many programs and in what format are currently being streamed from the device is its four outputs.

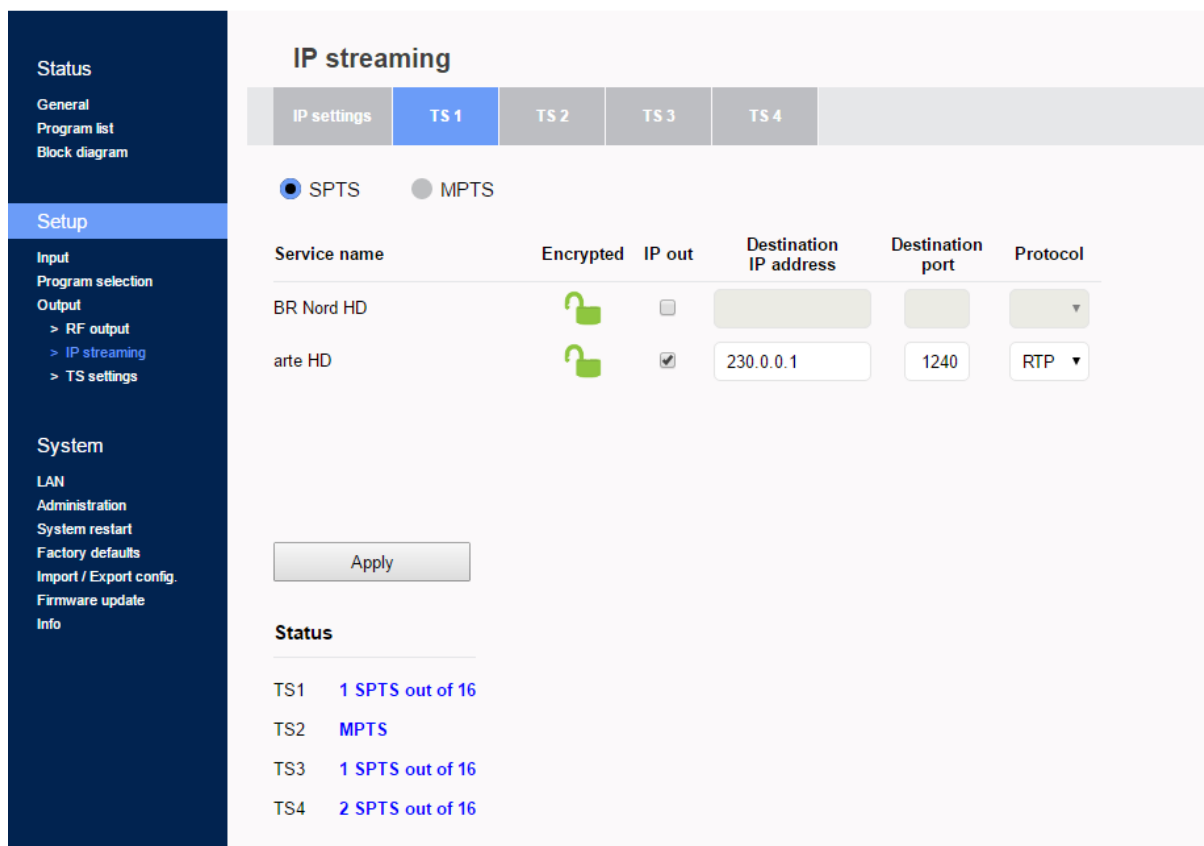

**Figure No 11**

In order to setup the IP address for each program there are four tabs one for each IP output of the DGL8500C/FTA.

By selecting e.g. the TS1 tab (Figure No 11) the user is able to setup the IP streamer for this specific output, following the steps below:

1<sup>st</sup> step: Select SPTS or MPTS streaming mode.

SPTS mode: Means that each program has its own IP

MPTS mode: Means that all the programs of the current output (e.g. TS1) will be streamed in a single IP.

2nd step: For each program (in SPTS mode) or for the whole TS (in MPTS mode) the user is able to assign a multicast IP address from 224.0.0.0 to 239.255.255.255 or a unicast IP address as well as its destination port and protocol (UDP or RTP).

By repeating the above procedure for all four outputs of the DGL8500C/FTA, the user is able to setup the IP streamer of the device.



#### 4.2.8 - “TS settings” page

In this section (Figure 12), the user is able to setup all the TS settings of the four multiplex in DGL8500C/FTA’s output.

	TS ID (1-65535)	Network ID (1-65535)	Original net ID (1-65535)	Network name (20 characters max.)	NIT
Output 1	101	102	103	DTV 1	Basic ▼
Output 2	104	105	106	DTV 2	Auto ▼
Output 3	107	108	109	DTV 3	Basic ▼
Output 4	110	111	112	DTV 4	Custom ▼

LCN provider: European ▼

Apply Refresh

Figure No 12

For each multiplex output the user can setup the following settings:

TS ID: Which is the ID No of the specific multiplex (1...65535)

Net ID: Which is the Net ID No of the specific multiplex (1...65535)

Original Net ID: Which is the Org. Net ID No of the specific multiplex. (1...65535)

Network name: Which is the network name of the specific multiplex

LCN provider: Choose the appropriate LCN provider (EACEM, ITC, Nordig, APN)

NIT: In this field the user is able to select on of the following NIT mode:

1. Off – In case we don’t need NIT
2. Basic – In case we need a basic NIT
3. Auto – In case we need a NIT with more information comparing to Basic.
4. From Input 1 – In case we need to pass-through the NIT from input No 1
5. From Input 2 – In case we need to pass-through the NIT from input No 2
6. From Input 3 – In case we need to pass-through the NIT from input No 3
7. From Input 4 – In case we need to pass-through the NIT from input No 4
8. From Input 5 – In case we need to pass-through the NIT from input No 5
9. From Input 6 – In case we need to pass-through the NIT from input No 6
10. From Input 7 – In case we need to pass-through the NIT from input No 7
11. From Input 8 – In case we need to pass-through the NIT from input No 8

#### 4.2.9 - “NIT” page

In this section (Figure 13) the user is able to setup several NIT (Network Identification Table) for DGL8500C/FTA’s output.

**Status**

- General
- Program list
- Block diagram

**Setup**

- Input
- Program selection
- Output
  - > RF output
  - > IP streaming
  - > TS settings
  - > **NIT**

**System**

- LAN
- Administration
- System restart
- Factory defaults
- Import / Export config.
- Firmware update
- Info

### NIT

Output 1 | Output 2 | Output 3 | Output 4

NIT mode: **Basic**

Network name:

Network ID:

NIT version:

LCN provider:

#	TSID	ONID	Freq (MHz)	Bandwidth	Constellation	Code rate	Guard interval	Transmission mode
---	------	------	------------	-----------	---------------	-----------	----------------	-------------------

Figure No 13

## System

### 4.2.9 - “LAN” page

In “LAN” page (Figure No 13) the user is able to setup all the parameters of the LAN control of the device as follows:

- DHCP – Enable or disable DHCP
- IP address: Set a static IP address for controlling the device
- Subnet mask: Set the specific Subnet mask
- Gateway: Set the gateway’s IP address
- Primary DNS: Set the IP address of the primary DNS
- Secondary DNS: Set the IP address of the secondary DNS
- Port: Assign the control port
- MAC address: Depicts the MAC address of the LAN control

The screenshot shows a web interface for IP address configuration. On the left is a dark blue sidebar with a menu. The 'System' section is highlighted in light blue, and the 'LAN' sub-section is selected. The main content area is titled 'IP address configuration' and has a dark blue header bar with the text 'All fields are required if DHCP is disabled.' Below this, there are several configuration options: 'Enable DHCP' with a toggle switch (currently off), 'IP address' with a text input field containing '192.168.1.200', 'Subnet mask' with a text input field containing '255.255.255.0', 'Gateway' with a text input field containing '192.168.1.1', 'Primary DNS' with a text input field containing '192.168.1.1', 'Secondary DNS' with a text input field containing '0.0.0.0', 'Port' with a text input field containing '80', and 'MAC address' with a text input field containing 'd8:80:39:30:6c:2a'. At the bottom right of the form is a 'Save' button.

IP address configuration	
All fields are required if DHCP is disabled.	
Enable DHCP	<input type="checkbox"/>
IP address	192.168.1.200
Subnet mask	255.255.255.0
Gateway	192.168.1.1
Primary DNS	192.168.1.1
Secondary DNS	0.0.0.0
Port	80
MAC address	d8:80:39:30:6c:2a
<button>Save</button>	

Figure No 14

#### 4.2.10 - “Administration” page

In “Administration” section the user is able to change the default password of the webserver.

The screenshot shows a web interface with a dark blue sidebar on the left and a light gray main content area. The sidebar has three sections: 'Status' (General, Program list, Block diagram), 'Setup' (Input, Program selection, Output with sub-items RF output, IP streaming, TS settings), and 'System' (LAN, Administration, System restart, Factory defaults, Import / Export config., Firmware update, Info). The 'Administration' page title is at the top of the main area. Below it is a dark blue instruction bar: 'Enter a new username and password in the fields below:'. The form contains three input fields: 'Username' (containing 'admin'), 'New password' (containing six dots), and 'Confirm new password' (empty). A 'Save' button is at the bottom right of the form.

Figure No 15

#### 4.2.11 - “System restart” page

In “System restart” section (Figure No 14) the user is able to apply a full reset to the device.

The screenshot shows a web interface with a dark blue sidebar on the left and a light gray main content area. The sidebar has two sections: 'Status' (General, Program list, Block diagram) and 'Setup' (Input, Program selection). The 'System restart' page title is at the top of the main area. Below it is a dark blue instruction bar: 'Click Restart to cause the device to perform a software restart.'. Below this is a text line: 'Wait a minute before logging into the device again.'. At the bottom is a 'Restart' button.

Figure No 16

#### 4.2.12 - “Factory default” page

In “Factory default” section (Figure No 15) the user is able to apply a factory default reset either as DVB-T or DVB-C.

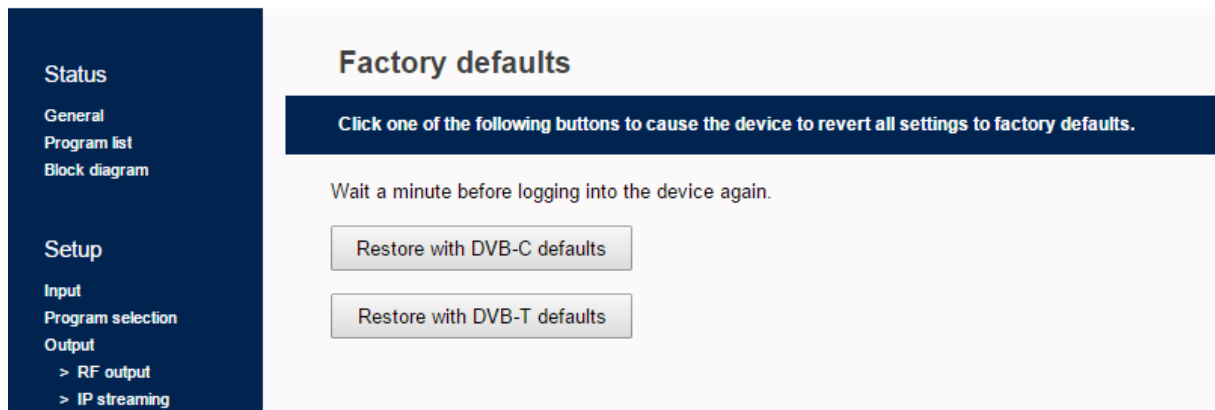


Figure No 17

#### 4.2.13 - “Import/Export Config” page

In “Import/Export Config” section (Figure No 16) the user is able to do the following:

1. Export: Save all the configuration in a specific file
2. Import: Upload a previously saved configuration file.

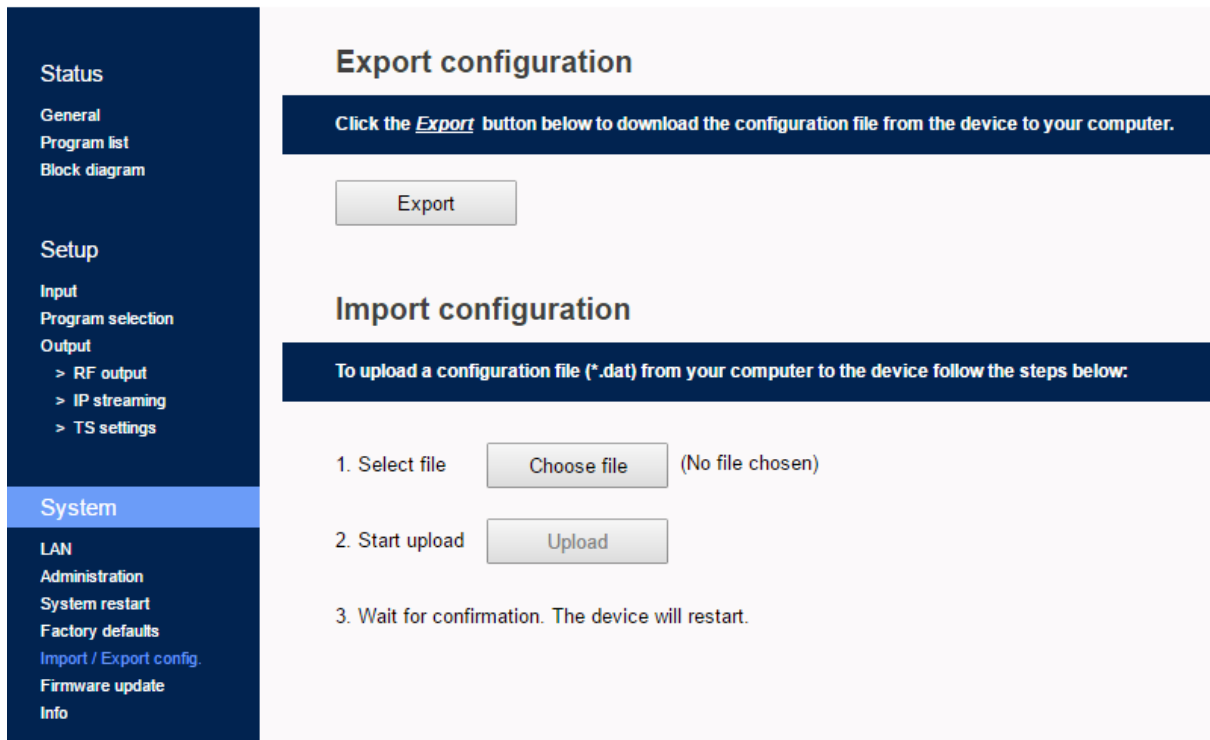


Figure No 18

#### 4.2.14 - “Firmware update” page

In “Firmware update” (Figure No 17) section the user is able to upload a new firmware update using the appropriate file.

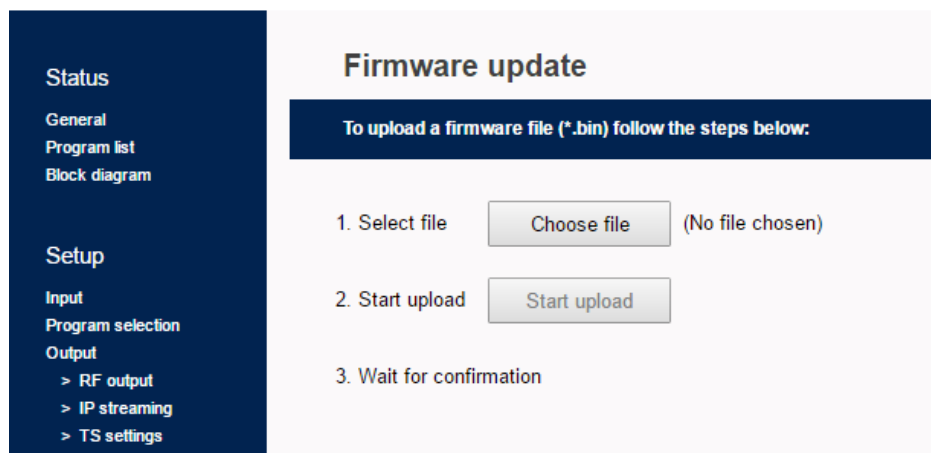


Figure No 19

#### 4.2.15 - “Info” page

In “Info” (Figure No 18) section the user is able to see the serial No of the device as well as firmware and hardware versions.

Status

General

Program list

Block diagram

Setup

Input

Program selection

Output

> RF output

> IP streaming

> TS settings

System

LAN

Administration

System restart

Factory defaults

Import / Export config.

Firmware update

Info

Info

Hardware and Firmware information

Serial number

1234567890

Firmware version

1.02

Platform HW version

08040A0D05550087

Platform FW version

0C08000000

Controller MAC address

d8:80:39:30:6c:2a

IP streamer MAC address

d8:80:39:55:6d:3f

Figure No 20

## 5. TECHNICAL SPECIFICATIONS

### Input Specifications

#### **Input**

Type	8 x DVB-S/S2/T/T2/C	
Frequencies	950...2150 MHz	DVB-S/S2
	118...900MHz	DVB-T/T2/C
Connector	75Ω - F, female	

#### **LNB**

Voltage	OFF / 13V / 18V
Current	< 400mA
22 KHz signal	On / Off
-Voltage	0.65V ±0.35V
-Frequency	22 KHz ±4Hz
-DiSEqC	1.0 (Port A, B, C, D)

#### **DVB-S**

Symbol Rate	1 - 45 MBaud
Roll off factor	0.35
Code Rate	1/2, 2/3, 3/4, 5/6, 7/8 (Automatic)
Spectral Inversion	Reverse, Non-reverse (Automatic)

#### **DVB-S2**

Constellation	QPSK, 8PSK (Automatic)
Symbol Rate	1 - 45 MBaud (QPSK) 1 - 30 MBaud (8PSK)
Roll off factor	0.2 / 0.35 (Automatic)
Code Rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 8/10 (QPSK-Automatic) 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 (8PSK-Automatic)
Spectral Inversion	Reverse, Non-reverse (Automatic)

#### **DVB-T**

Bandwidth	6, 7, 8 MHz
Mode	2K, 8K
Constellation	QPSK, 16QAM, 64QAM
Guard interval	1/4, 1/8, 1/16, 1/32
Code rate	1/2, 2/3, 3/4, 5/6, 7/8

#### **DVB-T2**

Bandwidth	5, 6, 7, 8 MHz
Mode	1K, 2K, 4K, 8K, 16K, 32K (Included extended mode)
Constellation	QPSK, 16QAM, 64QAM, 256QAM
Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6

#### **DVB-C (Annex A,B,C)**

Bandwidth	5, 6, 7, 8 MHz
Mode	Automatic modulation detection



Constellation	16QAM, 32QAM, 64QAM, 128QAM, 256QAM
---------------	-------------------------------------

### **Output Specifications**

#### **DVB-T**

Bandwidth	5, 6, 7, 8 MHz
Mode	2K, 8K
Constellation	QPSK, 16QAM, 64QAM
Guard interval	1/4, 1/8, 1/16, 1/32
Code rate	1/2, 2/3, 3/4, 5/6, 7/8

#### **DVB-C**

Bandwidth	5, 6, 7, 8 MHz
Mode	2K, 8K
Constellation	16QAM, 32QAM, 64QAM, 128QAM, 256QAM
Symbol rate	1-7.2 Ms/s

#### **RF Output**

Type	4 x RF out in adjacent channels
Output Frequencies	36...950 MHz (1 Hz step)
Output Level	90dBμV
Connector	75Ω - F, female
Output Attenuator	0...-20dB
MER	>40dB
Output loop-through loss	<1dB

#### **Transport Stream Processing**

Services	User selection by service names
Automatic Regeneration	PAT, CAT, SDT, PMTs, EITs tables
NIT	Pass-through, custom, automatic
PCR	re-stamping
LCN support	Yes

#### **IP Streaming**

IP TS Out	Yes
Protocol	UDP / RTP (Multicast/Unicast)
Speed	1 Gbit (480 Mbps in IP only mode)
IGMP support	Yes, v2, v3
Type	MPTS (up to 4 TS) SPTS (up to 8 HD programs)


#### **Programming Interface**

Ethernet webserver	Yes, embedded webserver
Speed	10/100 Mbps
Connector	RJ45
Browser compatibility	Chrome, Firefox, Safari, Opera, Edge et al.

**General**

Power Supply	~108 to 240 VAC 50/60Hz
Power supply consumption	55 VA max.
Operating Temperature	0 °C to 40 °C
Storage Temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	296.2 x 204.50 x 106 mm
Weight	1.7 Kg

## 6. DIMENSIONS

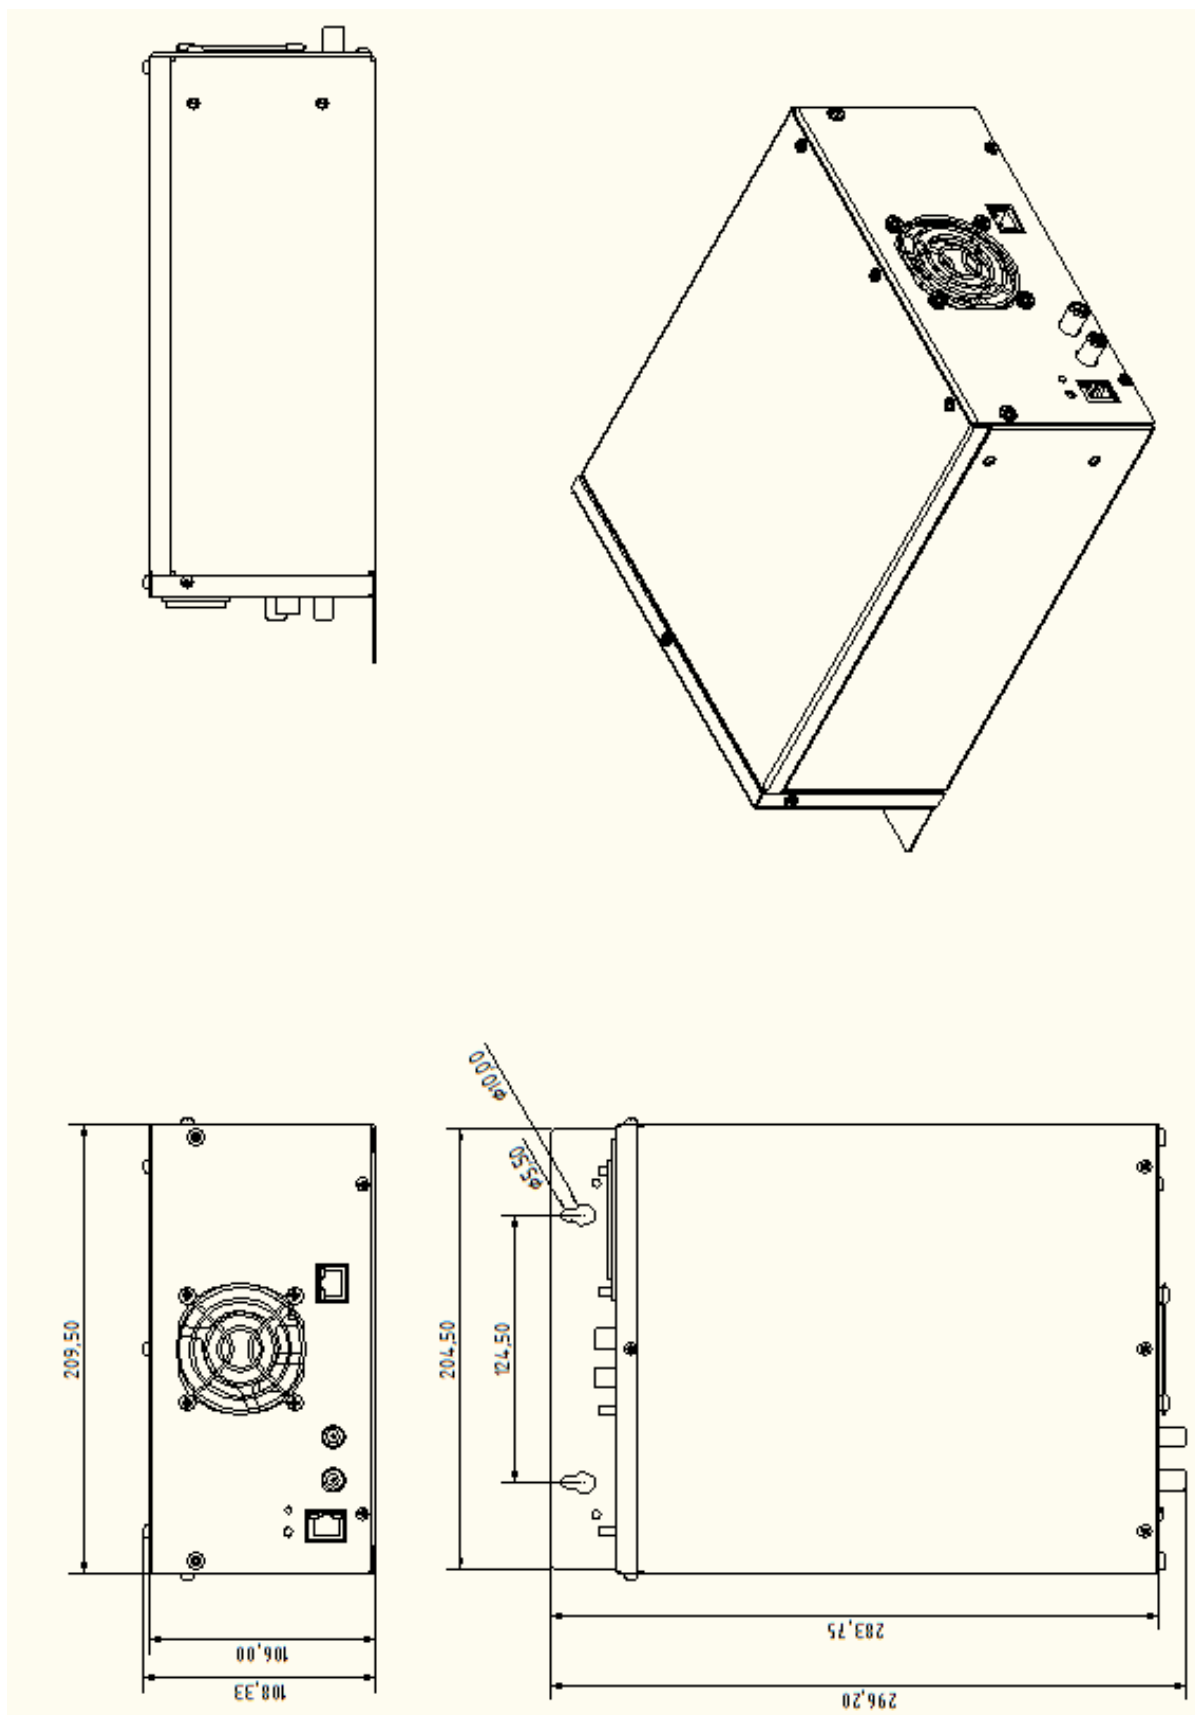

\*dimensions in mm

## **7. QM-PRODUCTS LIMITED WARRANTY**

This QM-products unit is guaranteed against defects in workmanship and materials for a period of five (5) years beginning on the date of purchase of the product. During the applicable warranty period, QM-products will repair or replace at our sole option, without charge, any defective component part of the purchased unit. The unit is to be delivered packed in adequate packing AFTER an authorization for return has been received.

The owner's responsibilities are to use the instrument in accordance with its written instructions, to provide transport to and from our facilities in the event service is required, and to provide proof of purchase if requested.

### **Our warranty does not cover any problem resulting from:**

- (a) accident; abuse; neglect; shock; electrostatic discharge; heat or humidity beyond product specifications; improper installation, operation, maintenance or modification
- (b) any misuse contrary to the instructions in the user manual
- (c) malfunctions caused by other equipment.

### **WARNING!!**

Our limited warranty is considered void if a product is returned with removed, damaged or tampered labels or any alterations (including removal of any component or external cover) carried out by unauthorized personnel.

### **OUT OF WARRANTY SERVICING**

We repair and service units of our production even once the warranty has expired, if this is economically the best solution to the customer.

The mechanical and electronic spare parts are replaceable for a five-year period after production when the circuits are assembled with discrete components. When integrated circuits are used, the supply of spare parts is guaranteed up to the depletion of our stock and, depending on the possibility of procuring them on the worldwide market.

To avoid any unnecessary loss of time, it is very important that the instrument be returned to our premises accompanied by a proper delivery note, duly completed with all the required information, as per the legal dispositions currently enforced.

### **Content warning**

This document contains preliminary information about a product of Digital Innovations BV company. Digital Innovations BV reserves the right to make any changes or modifications at any time without prior notice.

## **APPENDIX A**

DVB-T bitrates (Mbit/s) for **8 MHz** bandwidth (non-hierarchical systems)

Modulation	Coding Rate	Guard Interval			
		1/4	1/8	1/16	1/32
<b>QPSK</b>	1/2	4.976	5.529	5.855	6.032
	2/3	6.635	7.373	7.806	8.043
	3/4	7.465	8.294	8.782	9.048
	5/6	8.294	9.216	9.758	10.053
	7/8	8.709	9.676	10.246	10.556
<b>16-QAM</b>	1/2	9.953	11.059	11.709	12.064
	2/3	13.271	14.745	15.612	16.086
	3/4	14.929	16.588	17.564	18.096
	5/6	16.588	18.431	19.516	20.107
	7/8	17.418	19.353	20.491	21.112
<b>64-QAM</b>	1/2	14.929	16.588	17.564	18.096
	2/3	19.906	22.118	23.419	24.128
	3/4	22.394	24.882	26.346	27.144
	5/6	24.882	27.647	29.273	30.160
	7/8	26.126	29.029	30.737	31.668

DVB-T bitrates (Mbit/s) for **7 MHz** bandwidth (non-hierarchical systems)

Modulation	Coding Rate	Guard Interval			
		1/4	1/8	1/16	1/32
QPSK	1/2	4.354	4.838	5.123	5.278
	2/3	5.806	6.451	6.830	7.037
	3/4	6.532	7.257	7.684	7.917
	5/6	7.257	8.064	8.538	8.797
	7/8	7.620	8.467	8.965	9.237
16-QAM	1/2	8.709	9.676	10.246	10.556
	2/3	11.612	12.902	13.661	14.075
	3/4	13.063	14.515	15.369	15.834
	5/6	14.515	16.127	17.076	17.594
	7/8	15.240	16.934	17.930	18.473
64-QAM	1/2	13.063	14.515	15.369	15.834
	2/3	17.418	19.353	20.491	21.112
	3/4	19.595	21.772	23.053	23.751
	5/6	21.772	24.191	25.614	26.390
	7/8	22.861	25.401	26.895	27.710

DVB-T bitrates (Mbit/s) for **6 MHz** bandwidth (non-hierarchical systems)

Modulation	Coding Rate	Guard Interval			
		1/4	1/8	1/16	1/32
<b>QPSK</b>	1/2	3.732	4.147	4.391	4.524
	2/3	4.976	5.529	5.855	6.032
	3/4	5.599	6.221	6.587	6.786
	5/6	6.221	6.912	7.318	7.540
	7/8	6.532	7.257	7.684	7.917
<b>16-QAM</b>	1/2	7.465	8.294	8.782	9.048
	2/3	9.953	11.059	11.709	12.064
	3/4	11.197	12.441	13.173	13.572
	5/6	12.441	13.824	14.637	15.080
	7/8	13.063	14.515	15.369	15.834
<b>64-QAM</b>	1/2	11.197	12.441	13.193	13.572
	2/3	14.929	16.588	17.564	18.096
	3/4	16.796	18.662	19.760	20.358
	5/6	18.662	20.735	21.995	22.620
	7/8	19.595	21.772	23.053	23.751





# Declaration of Conformity



Certify and declare under our sole responsibility that the following apparatus:

**DGL8500C/FTA**

Conforms with the essential requirements of the EMC Directive 2004/108/EC the Safety Directive 2006/95/EC and 2001/65/EU RoHS Directive, based on the following specifications applied:

**EU Harmonized Standards:**

EN 55022:2010

EN 61000-3-2:2006+A1:2009+A2:2009, EN61000-3-3:2008

EN:55024:2010

EN 50083-2:2006, IEC60728-2:2010

EN 61000-4-2:2009, EN61000-4-3:2006+A1:2008+A2:2010

EN 61000-4-4:2012, EN61000-4-5:2006

EN 61000-4-6:2009, EN61000-4-8:2010, EN 61000-4-11:2004

EN 60950-1:2006+A11:2009+A1:2010+A12:2011+AC:2011

Signed

N.Gounalakis

A handwritten signature in black ink, appearing to read 'N. Gounalakis', written over a horizontal line.

Place: Baarle-Nassau

Dated: 02-01-2017

Managing Director

\* QM-products is register brand of Digital-Innovations B.V.

\*\*The Technical documentation is kept by the manufacturer